

## SIEMENS S7-300 front connector


Front adapters for SIMENS S7-300 cards with 40-pin

Digital / Analog combined use 40P


40P series



Dark gray

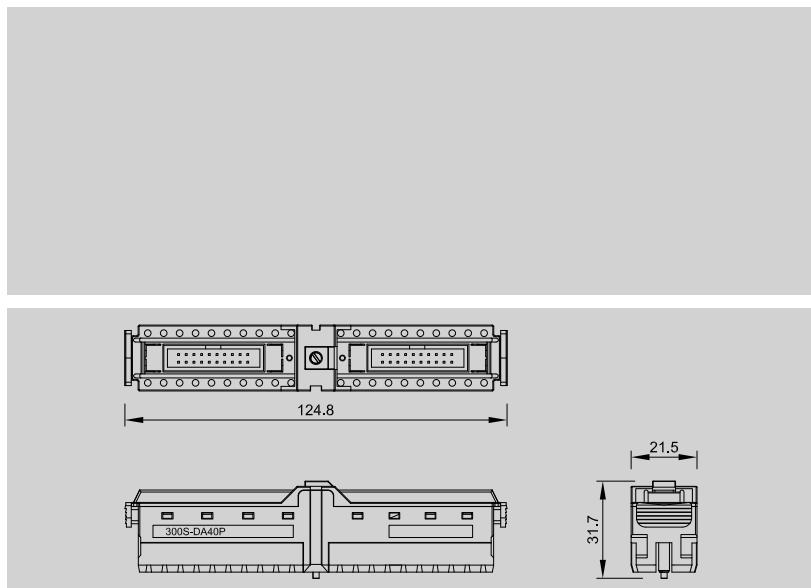

S7-300S-DA40P

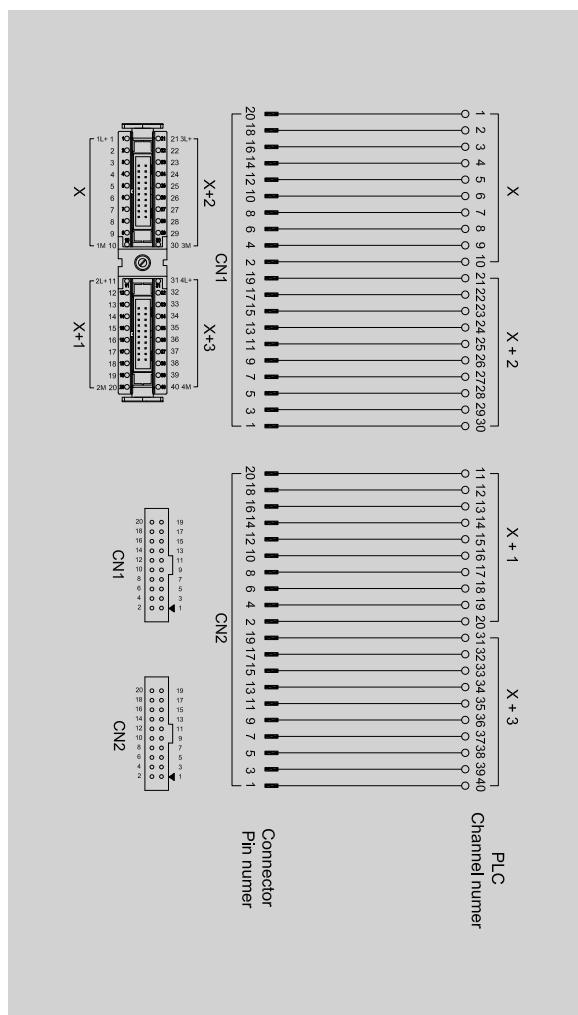

### Technical data

#### Connection data

|                   |  |
|-------------------|--|
| Connection to PLC | HE 10 connectors 20-pin x 2            |
| Connection type   | Onetouch connection                    |
| Connection size   | 0.14 ~ 0.3mm <sup>2</sup> (AWG26 ~ 22) |

#### Rated data

|                          |               |
|--------------------------|---------------|
| Rated voltage            | 60VDC / 30VAC |
| MAX. current per channel | 1.5A (AWG24)  |
| MAX. current per byte    | 4A            |
| Total operating current  | 34A           |

#### General data

|                                   |               |
|-----------------------------------|---------------|
| Ambient temperature (operational) | -25°C ~ 50°C  |
| Storage temperature               | -40°C ~ 60°C  |
| Weight                            | Approx. 52.5g |

#### Insulation coordination

|                          |          |
|--------------------------|----------|
| Rated insulation voltage | <50VAC   |
| Insulation test voltage  | 0.35kVAC |

#### Dimensions

|                              |                     |
|------------------------------|---------------------|
| Length x width x height (mm) | 124.8 x 21.5 x 31.7 |
|------------------------------|---------------------|

#### Ordering data

|           |           |
|-----------|-----------|
| Order No. | 014417002 |
|-----------|-----------|

#### Accessories / Spare part