

## Assembled round 40P cable

Assembled round cable for SIMENS S7-300


6ES7332-5HF00-0AB0

Analog output (current)

40P series



DAHHC4020-□K24B2

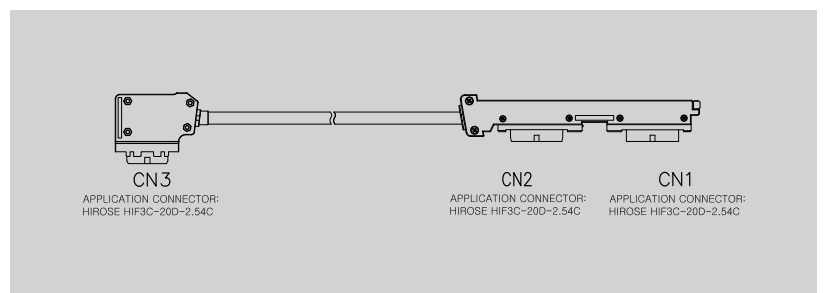

### Technical data

Connection data	
Connection to PLC	HE 10 connectors 20-pin x 2 / 20-pin
Connection type	Onetooth connection
Connection size	0.25mm <sup>2</sup> (AWG24)

Rated data	
Number of signals	20 point
Rated voltage	120VAC / 30VDC
MAX. connecor pin	1.5A
MAX. permissible summtion current	17A

General data	
Ambient temperature	-10°C ~ 50°C
Storage temperature	-10°C ~ 60°C
Insulation test voltage	0.5KV DC
Weight	Approx. ---g

Dimensions	
Length x width x height (mm)	

### Ordering data

Order No.	
044417007	

Accessories / Spare part

