




## RJ45 - Interfaces

RS232 4ch. connection (shield)

LT508 series



LT508-RJ45232-44PR (right connection)

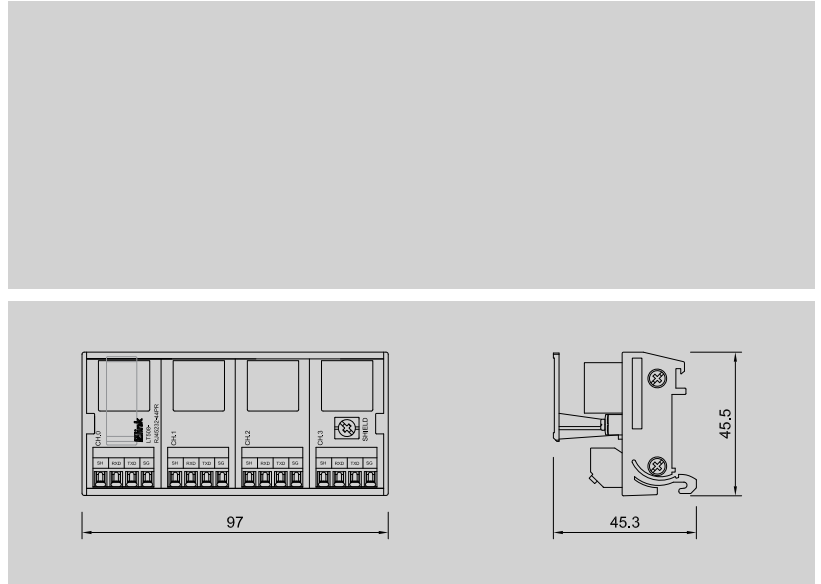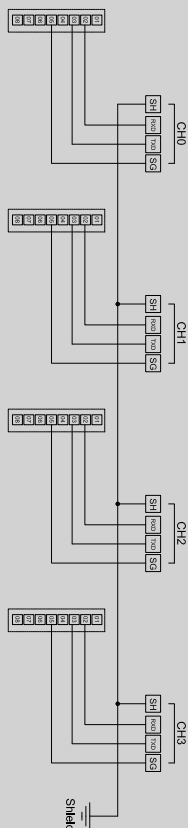

### Technical data

#### Connection data

Connection on control side	4 x RJ45 plug-in connectors
Connection size (field)	Push in spring x 4

#### Rated data

Operating voltage	50V
Operating current per connection	1A
Number of signals	12

#### General data

Ambient temperature	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Rated voltage	≤ 50V AC
Insulation test voltage	0.5KV DC
Weight	Approx. 70.9g

#### Dimensions

Length x width x height (mm)	5.08 Pitch	97 x 45.5 x 45.3
------------------------------	------------	------------------

#### Mounting rail

TS35 (Weidmuller)

#### Ordering data

Order No.	
	520620003 (5.08 Pitch)

#### Accessories / Spare part

Terminal markers	5.08
Cross-connector	

#### Use with

Front connector	Cable
-----------------	-------