
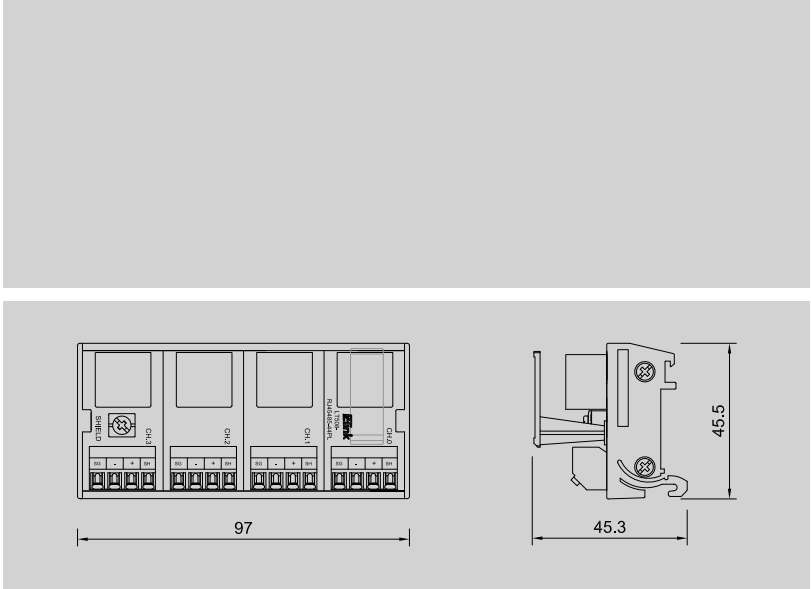


LT508-RJ45485-44PL (left connection)

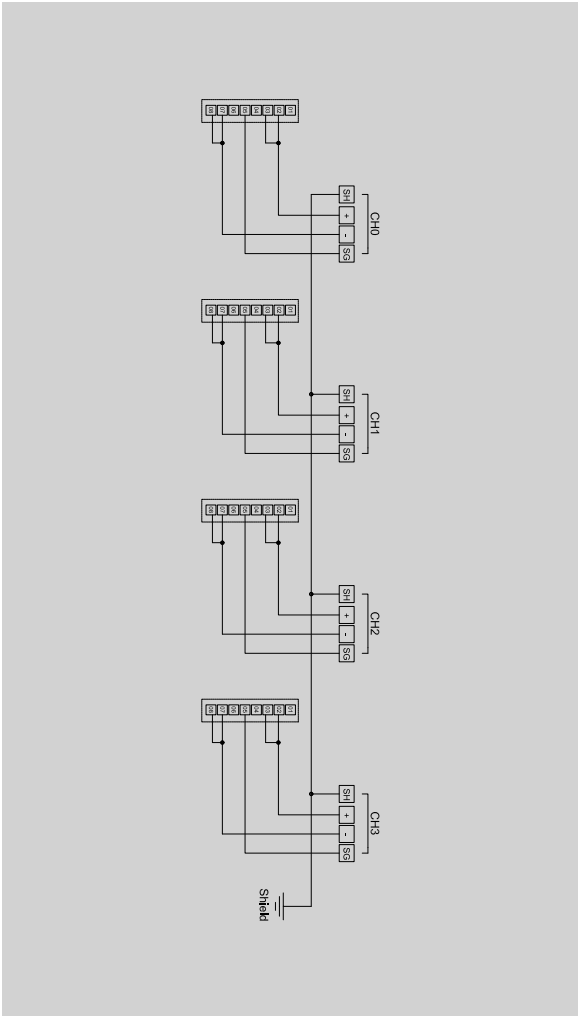

Technical data

| Connection data | |
|----------------------------|-----------------------------|
| Connection on control side | 4 x RJ45 plug-in connectors |
| Connection size (field) | Push in spring x 4 |

| Rated data | |
|----------------------------------|-----|
| Operating voltage | 50V |
| Operating current per connection | 1A |
| Number of signals | 12 |

| General data | |
|-------------------------|---------------|
| Ambient temperature | -25°C ~ 50°C |
| Storage temperature | -40°C ~ 60°C |
| Rated voltage | ≤ 50V AC |
| Insulation test voltage | 0.5KV DC |
| Weight | Approx. 70.9g |

| Dimensions | |
|------------------------------|-----------------------------|
| Length x width x height (mm) | 5.08 Pitch 97 x 45.5 x 45.3 |

| | |
|---------------|-------------------|
| Mounting rail | TS35 (Weidmuller) |
|---------------|-------------------|

| Ordering data | |
|---------------|------------------------|
| Order No. | 520620002 (5.08 Pitch) |

| Accessories / Spare part | |
|--------------------------|------|
| Terminal markers | 5.08 |
| Cross-connector | |

| Use with | |
|-----------------|-------|
| Front connector | Cable |