


Digital in / output 32 point

For 32 digital signals

6ES7321-1BL00-0AA0 / 6ES7321-1CH00-0AA0
6ES7322-1BL00-0AA0 / 6ES7322-5GH00-0AB0
6ES7322-8BH10-0AB0


ST650 / ST800 40P series




Bolt up

Bolt lock



Dark gray



ST650-DIO32SC 6.50 Pitch

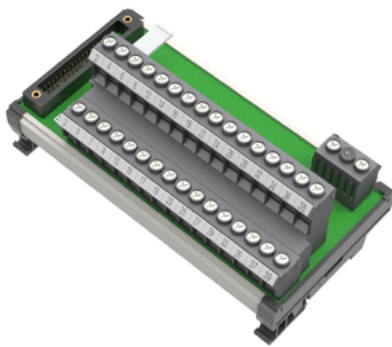

ST800-DIO32SC 8.00 Pitch

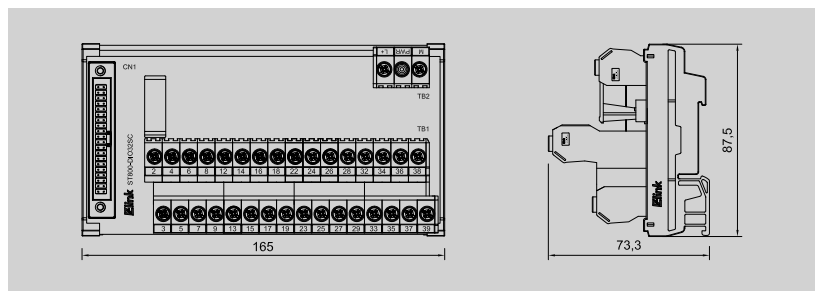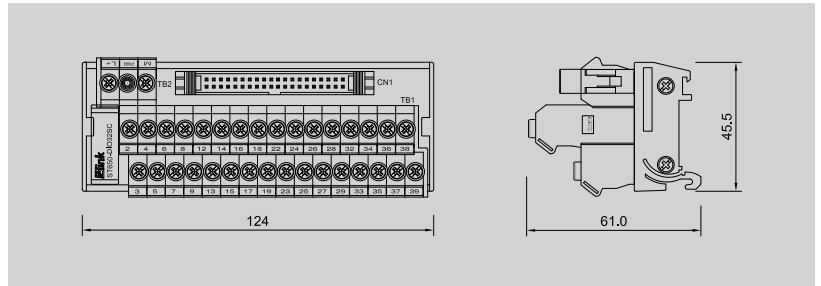

Technical data

Connection data	
Connection to PLC	HE 10 connectors 40-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)

Input-output data	
Operating voltage	24VDC ± 10%
Max. current for channel	1.5A
Number of signals	32
PLC card supply voltage / LED voltage status	24VDC ± 10% / LED green
LED fuse indication per channel	-
PLC card supply current	2A
Fuse per channel	-

General data	
Ambient temperature	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Rated voltage	≤ 50V AC
Insulation test voltage	0.5KV DC
Weight 6.50 / 8.00	Approx. 179.7g / 308.6g

Dimensions	
Length x width x height (mm)	6.50 Pitch 124 x 45.5 x 61 8.00 Pitch 165 x 87.5 x 73.3

Mounting rail TS35 (Weidmuller)

Ordering data

Order No.	
624217015 (6.50 Pitch)	824220016 (8.00 Pitch)

Accessories / Spare part

Terminal markers	6.50 8.00 DEK 5/8
Cross-connector	6.50 COM-6509 8.00 COM-8009

Use with

Front connector	Cable
S7-300S-DA40P	DHH40-10K25L Page : 107 DAHHC40-10K24B Page : 106

